



**Builder's Best, Inc.**  
 201 Broiles Drive  
 Jacksonville, TX 75766  
 903-586-8283  
 sales@buildersbest.com  
 BuildersBest.com

# All Metal Clothes Dryer Transition Duct UL® 2158A Listed



BUILDER'S BEST® V850-TD  
 SNAP-LOCK™

## DESCRIPTION

Builder's Best manufactures a complete line of UL2158A ALL METAL dryer venting. **Unlike foil based products, this product line is 100% aluminum and contains absolutely no adhesives.**

## PRODUCT FEATURES

- 4" diameter
- Ships compressed
- Various end treatments depending on the model (see model spec sheets for more information)



E-Z-FASTEN™ V550-TD  
 ONE CRIMPED FITTING, ONE SOFT CUFF END

## PRODUCT SPECIFICATIONS

- Class 0 non-insulated, non-combustible flexible aluminum air duct
- 100% aluminum roll formed with mechanical seams
- Meets UL® 2158A - designed for clothes dryer venting



READI-PIPE™ V450-TD  
 SOFT CUFF BOTH ENDS

## PART NUMBERS

Model	Dia.	Length	Clamps	Listing	Each #	Qty	Case #	Package
V850-TD	4"	6'	n/a	UL® 2158A	10548	12	110548	Bulk
V550-TD	4"	8'	n/a	UL® 2158A	10546	12	110546	Bulk
V450-TD	4"	6'	n/a	UL® 2158A	11700	12	111700	Bulk
V450-TD	4"	8'	n/a	UL® 2158A	10545	12	110545	Bulk
V450-TD	4"	8'	2 steel	UL® 2158A	12102	12	112102	Display Bag
V250-TD	4"	8'	n/a	UL® 2158A	10592	12	110592	Bulk
A250-TD	4"	8'	2 steel	UL® 2158A	12103	12	112103	Display Bag




V250-TD PLAIN ENDS

## PERFORMANCE DATA

- Recommended Operating Pressure:  
 Positive: 6" WC max  
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

## AIRFLOW

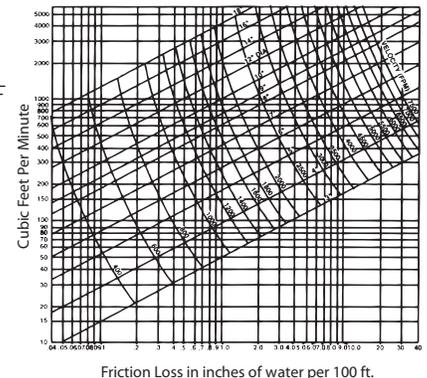

## LABELS



## WARRANTY

See complete warranty statement at <https://buildersbest.com/warranty/>

all metal ul2158a transition duct spec sheet V3 7/5/23