



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 888-368-7233
 fax: 800-259-8368
 www.BuildersBest.com

V730 "DOUBLE FEMALE" FLEXIBLE DUCT



DESCRIPTION

- Non-insulated flexible aluminum air duct, aluminum roll formed with crimp-locked airtight seam
- Designed for use in general purpose venting where a UL 181 listing is not required
- Class 0

PRODUCT SPECIFICATIONS

- 8' lengths
- 3", and 4" diameters
- Compressed to 24"
- Female Collars
- Available with and without clamps


PART NUMBERS

Diameter	Length	Part #	Qty	Package
3"	8'	011454	20	Bulk
4"	8'	011456	12	Bulk
With two steel clamps*				
3"	8'	011501		Bulk
4"	8'	011502		Bulk


PERFORMANCE DATA

- Recommended Operating Pressure:
 Positive: 6" WC max
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

AIRFLOW

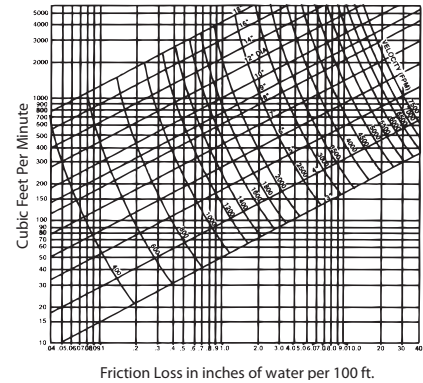

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

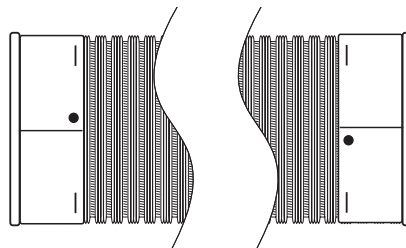

LABELS



WARRANTY

Manufacturer assumes no responsibility for failure due to improper installation. All specifications and designs are subject to change without notice and without incurring liability.

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice.

