



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@venting.biz
 BuildersBest.com

V321 Semi Rigid Flexible Duct

Double crimp one end



DESCRIPTION

This non-insulated general purpose venting duct is for low to medium operating pressure. It is a Class 0 non-combustible aluminum duct.

PRODUCT FEATURES

- One double crimped end for smooth connections
- 8' lengths
- 3", 4", 5", 6", 7", and 8" diameters


PRODUCT SPECIFICATIONS

- Semi rigid corrugated spiral formed out of 100% aluminum
- Compressed to 24"
- Mechanically locked together

PERFORMANCE DATA


- Pressure rating: maximum positive and negative: 6" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best.

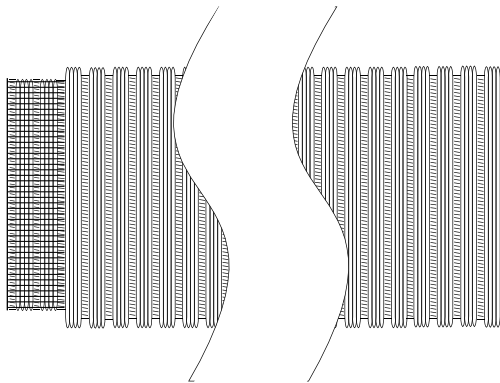

PART NUMBERS

Diameter	Length	Part #	Qty	Package
3"	8"	011471	20	Bulk
4"	8"	110584	12	Bulk
5"	8"	110585	6	Bulk
6"	8"	011473	4	Bulk
7"	8"	011474	4	Bulk
8"	8"	011475	4	Bulk

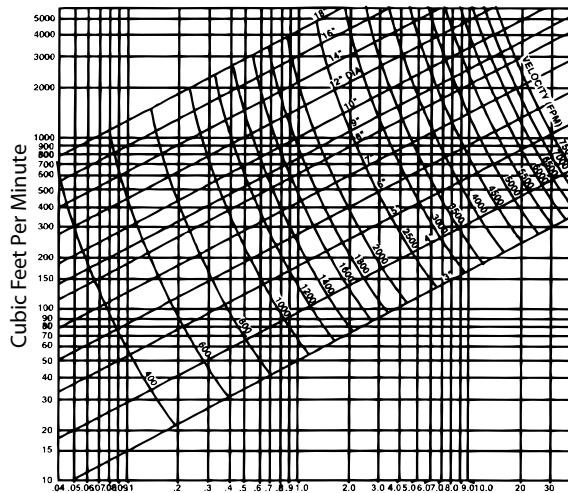

LABELS



WARRANTY

Complete Warranty Statement at <https://www.buildersbest.com>