



**Builder's Best, Inc.**  
 201 Broiles Drive  
 Jacksonville, TX 75766  
 903-586-8283  
 sales@venting.biz  
 BuildersBest.com

# V331 Semi Rigid Flexible Duct

## Double crimp one end



### DESCRIPTION

This non-insulated general purpose venting duct is for low to medium operating pressure. It is a Class 0 non-combustible aluminum duct.

### PRODUCT FEATURES

- One double crimped end for smooth connections
- 8' lengths
- 3" and 4" diameters


### PRODUCT SPECIFICATIONS

- Semi rigid corrugated spiral formed out of 100% aluminum
- Compressed to 24"
- Mechanically locked together

### PERFORMANCE DATA


- Pressure rating: Maximum positive and negative: 12" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best.

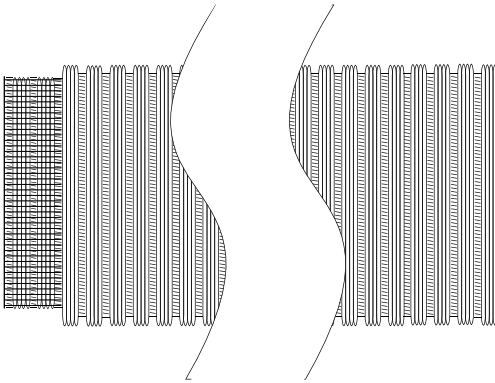

### PART NUMBERS

Diameter	Length	Part #	Qty	Package
3"	8'	011450	20	Bulk
4"	8'	011452	12	Bulk

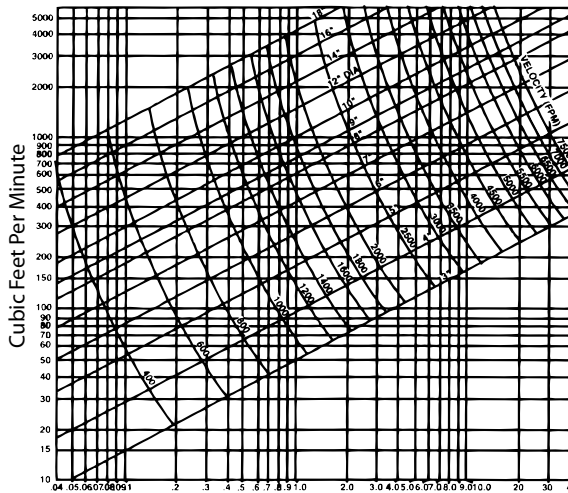

Friction Loss in inches of water per 100 ft.

### LABELS



### WARRANTY

Complete Warranty Statement at <https://www.buildersbest.com>