



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@venting.biz
 BuildersBest.com

E-Z-Fasten™ Pipe




DESCRIPTION

E-Z-Fasten™ Pipe is a durable semi-rigid flexible duct designed for clothes dryer venting. One end has a factory-installed crimped fitting which snaps to other SAF-T-DUCT® components. The OTHER soft-cuff pre-treated end saves time and provide more secure connections. Both ends fit standard 4" connections.

PRODUCT FEATURES

- 4" diameter
- Ships compressed
- One soft cuff end, one fitting slotted (female)

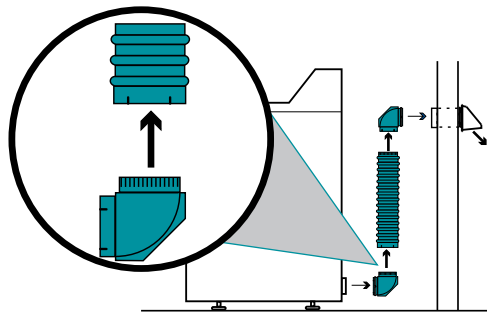


Crimped fittings are designed to Snap-Lock™ to elbows (like the Close Elbow™ pictured). The soft-cuff slotted end will fit over most 4" connections and compress down for a secure fit.

PRODUCT SPECIFICATIONS

- Non-insulated, non-combustible flexible aluminum air duct. Aluminum roll formed with crimp-locked seam.
- Designed for use as a dryer transition duct. One 4" aluminum Snap-Lock™ crimped fitting connects without clamps to other Snap-Lock™ fittings or to standard 4" connections. The soft-cuff end treatment eases installation.
- Class 0

PART NUMBERS

Model	Dia.	Length	Listing	Each #	Qty	Case #	Package
V550-TD	4"	8'	UL® 2158A	10546	12	110546	Bulk
V530	4"	5'	n/a	10130	5	110130	Display Bag
V530	4"	5'	n/a	10105	15	110105	Bulk
V530	4"	8'	n/a	10180	20	110180	Bulk
V530	4"	2'	n/a	10160	12	110160	Bulk

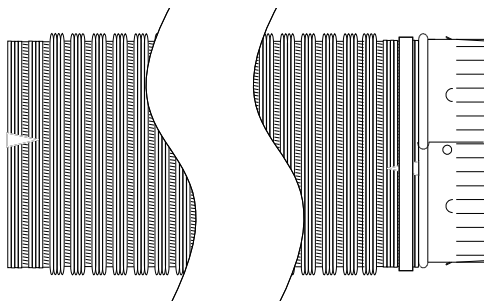


PERFORMANCE DATA

- Recommended Operating Pressure:
 Positive: 6" WC max
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

AIRFLOW

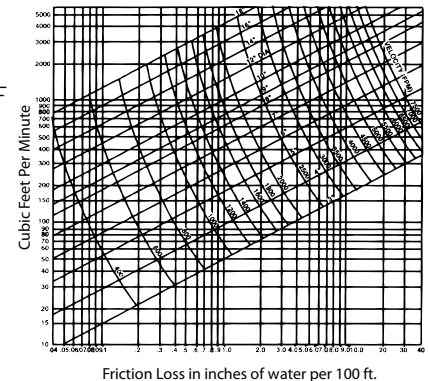

LABELS



WARRANTY

See complete warranty statement at <https://buildersbest.com/warranty/>