



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@venting.biz
 BuildersBest.com

Readi-Pipe™



DESCRIPTION

Readi-Pipe™ is a durable semi-rigid flexible duct designed for clothes dryer venting. The soft-cuff pre-treated ends save time and provide more secure connections.

PRODUCT FEATURES


- 4" diameter
- Ships compressed
- Soft cuff ends

PRODUCT SPECIFICATIONS

- Non-insulated, non-combustible flexible aluminum air duct. Aluminum roll formed with crimp-locked seam.
- Designed for use as a dryer transition duct.
- Class 0

PART NUMBERS


Model	Dia.	Length	Clamps	Listing	Each #	Qty	Case #	Package
V450-TD	4"	6'	n/a	UL® 2158A	11700	12	111700	Bulk
V450-TD	4"	8'	n/a	UL® 2158A	10545	12	110545	Bulk
V450-TD	4"	8'	2 steel	UL® 2158A	12102	12	112102	Display Bag
V430	4"	4'	n/a	n/a	10088	12	110088	Bulk
V430	4"	5'	n/a	n/a	10089	12	110089	Bulk
V430	4"	6'	n/a	n/a	10090	15	110090	Bulk
V430	4"	8'	n/a	n/a	10091	12	110091	Bulk
V430	4"	8'	2 steel	n/a	10131	12	110131	Display Bag

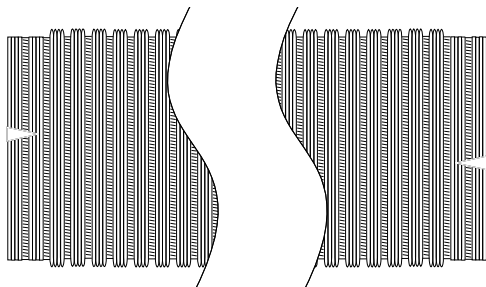

PERFORMANCE DATA

- Recommended Operating Pressure:
 Positive: 6" WC max
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

AIRFLOW

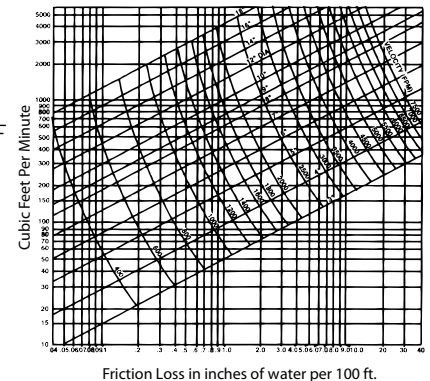

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

LABELS



WARRANTY

See complete warranty statement at <https://buildersbest.com/warranty>