



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@venting.biz
 BuildersBest.com

V250-TD Plain End



DESCRIPTION

V250-TD Plain End is a durable semi-rigid flexible duct designed for clothes dryer venting with a UL® 2158A label.

PRODUCT FEATURES


- 4" diameter
- Ships compressed
- Plain Ends

PRODUCT SPECIFICATIONS

- Non-insulated, non-combustible flexible aluminum air duct. Aluminum roll formed with crimp-locked seam.
- Designed for use as a clothes dryer transition duct.
- Class 0

PART NUMBERS

Model	Dia.	Length	Listing	Each #	Qty	Case #	Package
V250-TD	4"	8'	UL® 2158A	10592	12	110592	Bulk

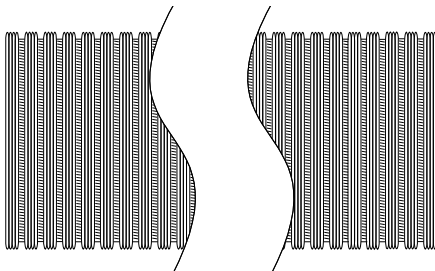


PERFORMANCE DATA

- Recommended Operating Pressure:
 Positive: 6" WC max
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

AIRFLOW

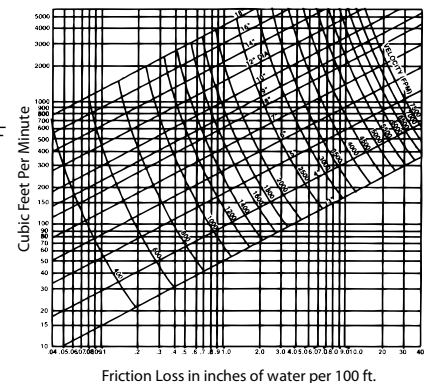

LABELS



WARRANTY

See complete warranty statement at <https://buildersbest.com/warranty/>