



**Builder's Best, Inc.**  
 201 Broiles Drive  
 Jacksonville, TX 75766  
 903-586-8283  
 sales@venting.biz  
 BuildersBest.com

# In-Wall Periscope Galvanized & Aluminum

## DESCRIPTION

The In-Wall Periscope is a rigid clothes dryer duct for use in-wall or on-wall.

## PRODUCT FEATURES


- Four piece assembly of 2" x 6" rigid material
- Standard 4" diameter fittings, one male snap-lock and one female snap-lock
- Mounting strap
- Sections are reversible, for airflow same or opposite
- Smooth interior decreases air friction

## PRODUCT SPECIFICATIONS

- See material by part number below
- 4" Slotted female fitting
- 4" Crimped snap-lock male fitting

## PART NUMBERS

Dia.	Length	Material	Each #	Qty	Case #	Package	UPC
4"	29"-72"	30 ga. Galvanized	10868	3	110868	Ind. Box	722048108684
4"	52"-95"	30 ga. Galvanized	10869	3	110869	Ind. Box	722048108691
4"	29"-72"	26 ga. Aluminum	10094	3	110094	Display Box	722048100947
4"	29"-72"	26 ga. Aluminum	10140	3	110140	Ind. Box	722048101401

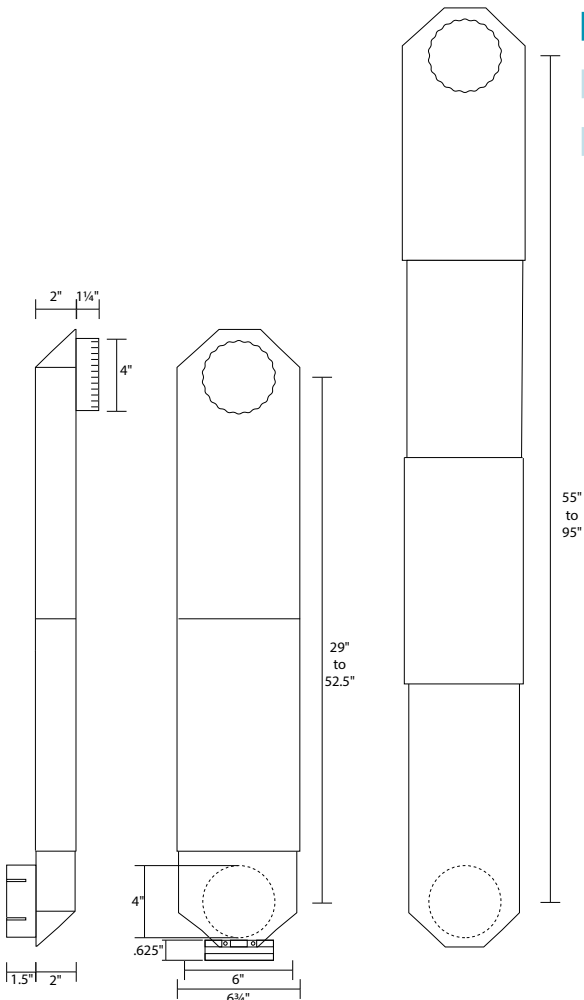

55"  
to  
95"

29"  
to  
52.5"

## RECOMMENDATIONS

- The International Mechanical Code recommends rigid metal duct for dryer exhaust as well as in-wall exhaust. IMC 504.6.1 & 504.8-3
- Dryer manufacturers specify "Only rigid or flexible metal vent shall be used for exhausting. Do not use plastic or metal foil vent."

## PERFORMANCE DATA AND AIRFLOW

Pressure Rating:

Positive: 6" WC max Negative: 6" WC max

Maximum velocity: 5,000 FPM

Operating Temp. Range: -100°F to+ 430°F

Flame Spread 0 Smoke Developed 0

INSTALLATION: (Installation instructions are included inside each carton.)

## PATENTS:

US 5,653,631; 5,943,743; 6,035,495; 5,121,948;  
 D.342,782  
 Canadian 2,062,123; 2,063,098; 2,201,956; 2,279,599

## LABELS



## INSTRUCTIONS & WARRANTY

at [buildersbest.com](http://buildersbest.com)

Periscope In-Wall V1.pdf 9/25/20