




Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 www.BuildersBest.com

SEMI RIGID FLEXIBLE ALUMINUM DUCT V220 Plain Ends

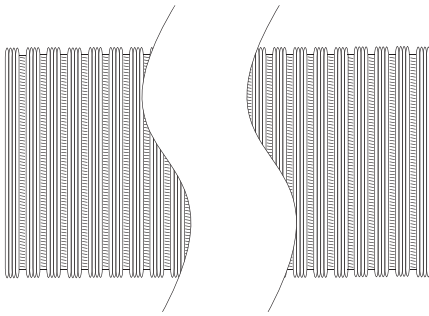

DESCRIPTION

The V220 Semi-Rigid Flexible Aluminum Duct is a non-insulated Class 0 duct used as general purpose venting supply, return or exhaust.

PRODUCT FEATURES

- Plain ends
- 8 ft length ships compressed to 23 in


PRODUCT SPECIFICATIONS

- Thinner wall than V230 PRO
- Semi-rigid corrugated spiral formed out of 100% aluminum alloy
- Non-combustible corrugated aluminum with continuous lockseams
- Class 0 metal duct, non-insulated

PART NUMBERS

Dia	Length	Clamps	Each #	Qty	Case #	Package	UPC	Labeled
3"	8'		10453	10	110453	Display Bag	722048104532	•
3"	8'		11583	10	111583	Display Tag	722048115835	•
3"	8'		10403	20	011436	Bulk	722048104037	
3"	10'		10413	20	110413	Bulk	722048104136	
3"	20'		10420	25	110420	Bulk	722048104204	
3"	25'		10421	25	110421	Bulk	722048104211	
4"	5'		10400	15	110400	Bulk	722048104006	
4"	8'		10454	12	110454	Display Bag	722048104549	•
4"	8'		11584	12	111584	Display Tag	722048115842	•
4"	8'		10404	12	110404	Bulk	722048104044	
4"	10'		10414	12	110414	Bulk	722048104297	
4"	20'		10429	16	110429	Bulk	722048104198	
4"	25'		10419	16	110419	Bulk	722048115859	
5"	8'		11585	6	111585	Display Tag	722048115859	•
5"	8'		10405	6	110405	Bulk	722048104051	
5"	10'		10415	9	011440	Bulk	722048104150	
5"	20'		10425	9	110425	Bulk	722048104259	
6"	8'		11586	4	111586	Display Tag	722048115866	•
6"	8'		10406	4	011441	Bulk	722048104068	
6"	10'		10416	12	110416	Bulk	722048104167	
6"	10'		10822	12	110822	Display Tag	722048108226	•
6"	20'		10426	6	011443	Bulk	722048104266	
7"	8'		11587	4	111587	Display Tag	722048115873	•
7"	8'		10407	4	011444	Bulk	722048104075	
7"	10'		10417	8	110417	Bulk	722048104174	
7"	10'		10823	8	110823	Display Tag	722048108233	•
8"	8'		11588	4	111588	Display Tag	722048115880	•
8"	8'		10408	4	011447	Bulk	722048104082	
8"	10'		10418	6	110418	Bulk	722048104181	
8"	10'		10824	6	110824	Display Tag	722048108240	•
4"	8'	2 steel screw	10459	12	110459	Display Bag	722048104594	•

AIRFLOW

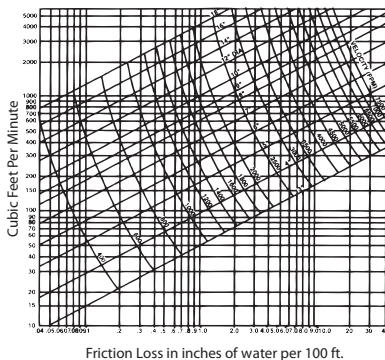

PERFORMANCE DATA

- Recommended Operating Pressure:
 Maximum positive and negative = 6" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

LABELS



WARRANTY

Complete warranty statement at buildersbest.com/warranty