



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 www.BuildersBest.com

SEMI RIGID FLEXIBLE ALUMINUM DUCT V230 PRO Plain Ends



DESCRIPTION


The V230 PRO Semi-Rigid Flexible Aluminum Duct is a non-insulated Class 0 duct used as general purpose venting supply, return or exhaust.

PRODUCT FEATURES

- Plain ends
- 8 ft length ships compressed to 24 in

PRODUCT SPECIFICATIONS


- Thicker wall than V220
- Semi-rigid corrugated spiral formed out of 100% aluminum alloy
- Class 0 metal duct, non-insulated
- Non-combustible corrugated aluminum with continuous lockseams

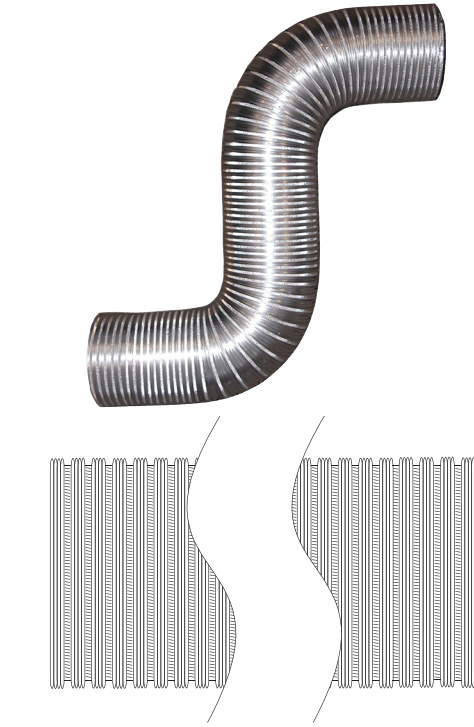

PART NUMBERS

Dia.	Length	Clamps	Each #	Qty	Case #	Package	UPC Label?
3"	8'		10250	20	110250	Bulk	
3"	10'		10251	20	110251	Bulk	
3"	20'		10401	25	110401	Bulk	
3"	25'		10252	25	110252	Bulk	
4"	8'		10087	12	110087	Bulk	
4"	10'		10253	12	110253	Bulk	
4"	20'		10402	16	110402	Bulk	
4"	25'		10315	16	110315	Bulk	
5"	8'		10255	6	011476	Bulk	
5"	10'		10256	9	110256	Bulk	
5"	20'		10257	9	110257	Bulk	
6"	8'		10258	4	011479	Bulk	
6"	10'		10259	12	110259	Bulk	
6"	20'		10260	6	110260	Bulk	
7"	8'		10261	4	011482	Bulk	
7"	10'		10262	8	110262	Bulk	
7"	20'		10263	4	110263	Bulk	
8"	8'		10264	4	110264	Bulk	
8"	10'		10265	6	011487	Bulk	
8"	20'		10266	4	110266	Bulk	
9"	8'		10267	4	110267	Bulk	
9"	10'		10268	4	110268	Bulk	
9"	20'		10269	4	110269	Bulk	
10"	8'		10383	4	110383	Bulk	
10"	10'		10384	4	110384	Bulk	
10"	20'		10385	4	110385	Bulk	
12"	8'		10247	4	110247	Bulk	
14"	8'		10248	2	110248	Bulk	
4"	8'	2 steel screw	10460	12	110460	Display Bag	•

AIRFLOW

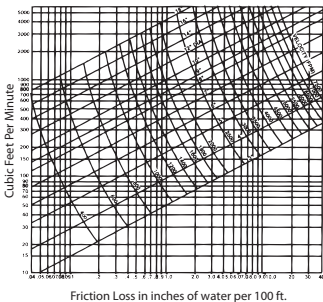

PERFORMANCE DATA

- Recommended Operating Pressure:
 Maximum positive and negative = 6" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

WARRANTY

Complete warranty statement at buildersbest.com/warranty

Duct V230 Pro semi rigid flex alum spec sheet V3 7/19/22

LABELS



Made in the U.S.A.

