



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 www.BuildersBest.com

SEMI-RIGID FLEXIBLE ALUMINUM DUCT V330 PRO Crimped One End



DESCRIPTION


The V330 PRO Semi-Rigid Flexible Aluminum Duct is a non-insulated Class 0 duct used as general purpose venting supply, return or exhaust.

PRODUCT FEATURES

- One end crimped and one plain end
- 8 ft length ships compressed to 24 in

PRODUCT SPECIFICATIONS


- Thicker wall than V320
- Semi-rigid corrugated spiral formed out of 100% aluminum alloy
- Class 0 metal duct, non-insulated
- Non-combustible corrugated aluminum with continuous lockseams

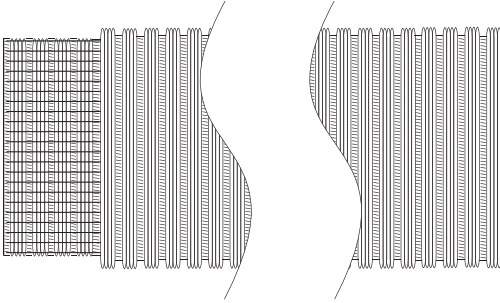

PART NUMBERS

Dia.	Length	Each #	Qty	Case #	Package	UPC labeled?
3"	8'	10308	20	011489	Bulk	
3"	8'	11637	10	111637	Display Tag	•
4"	8'	10312	12	011491	Bulk	
4"	8'	11638	12	111638	Display Tag	•
5"	8'	10316	6	011493	Bulk	
6"	8'	10317	4	110317	Bulk	
6"	8'	11640	4	111640	Display Tag	•
7"	8'	10319	4	110319	Bulk	
8"	8'	10320	4	110320	Bulk	
8"	8'	11699	4	111699	Display Tag	•
9"	8'	10322	4	110322	Bulk	
10"	8'	10323	4	110323	Bulk	
10"	8'	11702	4	111702	Display Tag	•
12"	8'	10246	4	110246	Bulk	
14"	8'	11393	2	111393	Bulk	

AIRFLOW

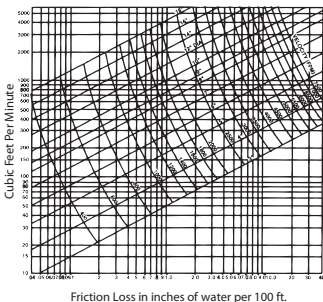

PERFORMANCE DATA

- Recommended Operating Pressure:
 Maximum positive and negative = 6" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

LABELS



WARRANTY

Complete warranty statement at buildersbest.com/warranty