



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 www.BuildersBest.com

SEMI RIGID FLEXIBLE ALUMINUM AIR DUCT V250 Metalflex® Plain Ends



DESCRIPTION


Metalflex® V250 Air Duct is UL Listed as a Class 0 Air Duct for general HVAC supply, return and exhaust. The Metalflex® design allows for better stretching and bending characteristics.

PRODUCT FEATURES

- Plain ends
- Ships compressed
- UL® 181 labeled

PRODUCT SPECIFICATIONS


- Metalflex® design allows for better stretching and bending characteristics. This helps eliminate flattening on the outside radius of a bend thus preventing restricted airflow.
- Spiral formed out of aluminum alloy with 30° strength angles between ribs, mechanically locked together with continuous “Acme” lock
- Metalflex® product is produced using the same process, machinery, and materials that has made it so successful for the past 40+ years.
- NFPA 90a and 90b.

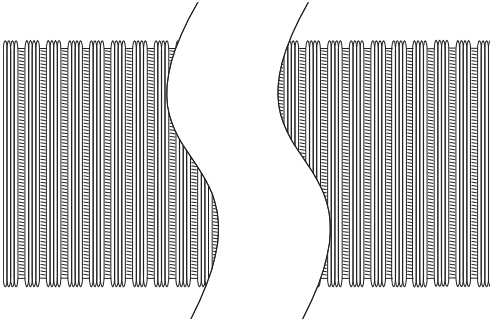

PART NUMBERS

Dia.	Length	Each #	Qty	Case #	Package
3"	8'	10803	56	110803	Bulk
3"	10'	10801	40	110801	Bulk
4"	8'	10804	30	110804	Bulk
4"	10'	10802	24	110802	Bulk
5"	8'	10805	15	110805	Bulk
5"	10'	10690	15	110690	Bulk
6"	8'	10806	12	110806	Bulk
6"	10'	10691	12	110691	Bulk
7"	8'	10807	8	110807	Bulk
7"	10'	10692	6	110692	Bulk
8"	8'	10808	6	110808	Bulk
8"	10'	10693	6	110693	Bulk
9"	8'	10809	5	110809	Bulk
10"	8'	10810	4	110810	Bulk

AIRFLOW

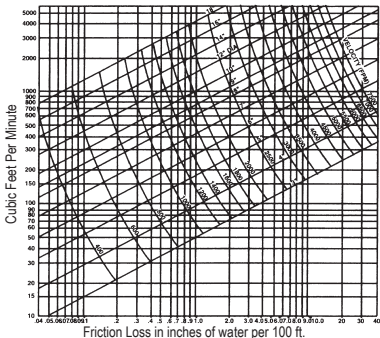

PERFORMANCE DATA

- Recommended Operating Pressure:
 Maximum positive and negative:
 3" thru 10" diameters = 12" w.g.
 12" diameter = 8" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best and as required by the UL 181 listing procedure. (Installation instructions are included inside each carton.)

LABELS



WARRANTY

Complete warranty statement at buildersbest.com/warranty