



**Builder's Best, Inc.**  
 201 Broiles Drive  
 Jacksonville, TX 75766  
 903-586-8283  
 sales@buildersbest.com  
 BuildersBest.com

# V250-TD Plain End



## DESCRIPTION


V250-TD Plain End is a durable semi-rigid flexible duct meeting UL® 2158A specifications designed for clothes dryer venting.

## PRODUCT FEATURES

- Plain ends
- Ships compressed

## PRODUCT SPECIFICATIONS

- 100% aluminum roll formed with mechanical seams
- Class 0 metal duct, non-insulated
- UL® 2158A Clothes Dryer Transition Duct

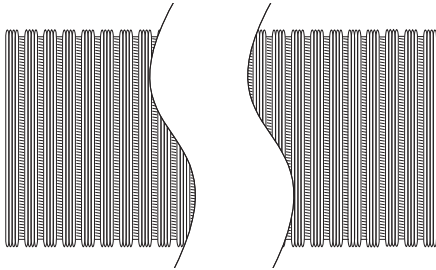


## PART NUMBERS

Model	Dia.	Length	Listing	Each #	Qty	Case #	Package
V250-TD	4"	8'	UL® 2158A	10592	12	110592	Bulk

## PERFORMANCE DATA AIRFLOW

- Recommended Operating Pressure:  
 Positive: 6" WC max  
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joins shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

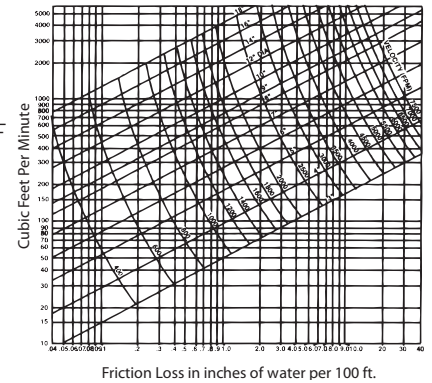

## LABELS



## WARRANTY

See complete warranty statement at <https://buildersbest.com/warranty/>