



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 BuildersBest.com

E-Z-Fasten™ Pipe V550-TD & V530



DESCRIPTION


V500 series E-Z-Fasten™ Pipe is a durable semi-rigid flexible duct designed for clothes dryer venting. One factory-installed crimped fitting snaps to other SAF-T-DUCT® components. One soft cuff end with slots forms easily. These pre-treated ends save time and provide more secure connections.

PRODUCT FEATURES

- One Snap-Lock™ fitting crimped (male), one soft cuff end (female)
- Ships compressed


PRODUCT SPECIFICATIONS

- 100% aluminum roll formed with mechanical seams
- Class 0 metal duct, non-insulated
- UL® 2158A Clothes Dryer Transition Duct Available

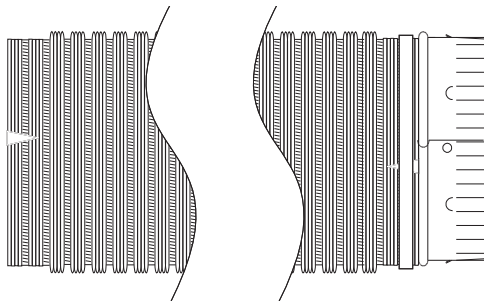

PART NUMBERS

Model	Dia.	Length	Listing	Each #	Qty	Case #	Package
V550-TD	4"	8'	UL® 2158A	10546	12	110546	Bulk
V530	4"	5'	n/a	10130	5	110130	Display Bag
V530	4"	5'	n/a	10105	15	110105	Bulk
V530	4"	8'	n/a	10180	20	110180	Bulk
V530	4"	2'	n/a	10160	12	110160	Bulk

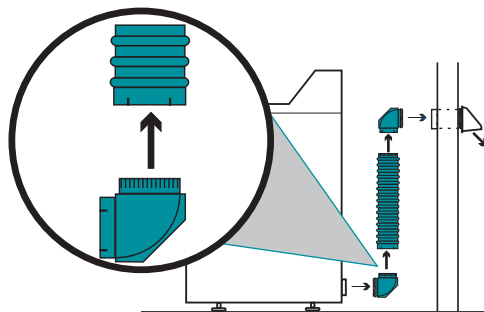


Crimped fittings are designed to Snap-Lock™ to elbows (like the Close Elbow™ pictured). The soft-cuff slotted end will fit over most 4" connections and compress down for a secure fit.

PERFORMANCE DATA

- Recommended Operating Pressure:
 Positive: 6" WC max
 Negative: 6" WC max
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

AIRFLOW

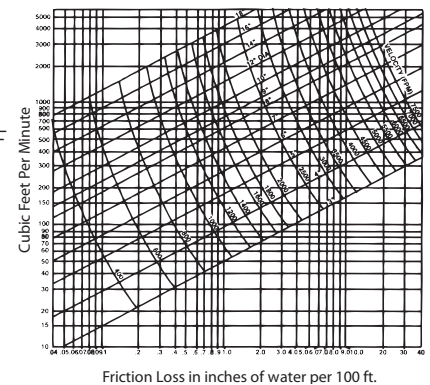

LABELS



WARRANTY

See complete warranty statement at <https://buildersbest.com/warranty/>