



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 www.BuildersBest.com
 sales@buildersbest.com

SEMI RIGID FLEXIBLE ALUMINUM AIR DUCT V350-U Metallflex® Crimped One End



DESCRIPTION


Metallflex® V350-U Air Duct is an uncompressed UL Listed Class 0 Air Duct with one crimped end for general HVAC supply, return and exhaust. The Metallflex® design allows for better stretching and bending characteristics.

PRODUCT FEATURES

- Crimped one end, one end plain
- Ships Uncompressed
- UL® 181

PRODUCT SPECIFICATIONS


- Metallflex® design allows for better stretching and bending characteristics. This helps eliminate flattening on the outside radius of a bend thus preventing restricted airflow.
- Spiral formed out of aluminum alloy with 30° strength angles between ribs, mechanically locked together with continuous "Acme" lock
- Crimped ends slides easily into plain end, ensuring smooth connections
- Metallflex® product is produced using the same process, machinery, and materials that has made it so successful for the past 40+ years.
- Meets NFPA 90a and 90bNFPA 90a and 90b

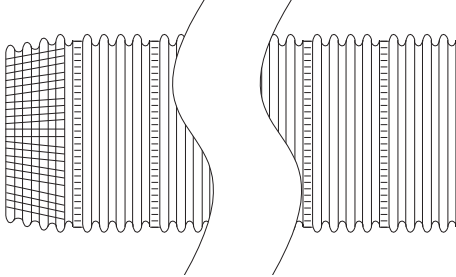

PART NUMBERS

Dia.	Length	Each #	Qty	Case #	Package	Note	UPC
3"	8'	10744	42	110744	Bulk	Regional Availability	722048107441
4"	8'	10745	25	110745	Bulk	Regional Availability	722048107458
5"	8'	10759	16	110759	Bulk	Regional Availability	722048107595
6"	8'	10760	12	110760	Bulk	Regional Availability	722048107601
7"	8'	10761	9	110761	Bulk	Regional Availability	722048107618
8"	8'	10762	6	110762	Bulk	Regional Availability	722048107625
9"	8'	10763	5	110763	Bulk	Regional Availability	722048107632
10"	8'	10764	4	110764	Bulk	Regional Availability	722048107649
12"	8'	10755	2	110755	Bulk	Regional Availability	722048107557

AIRFLOW

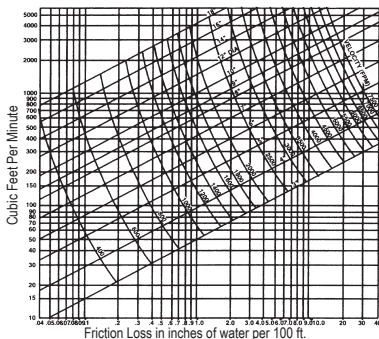

PERFORMANCE DATA

- Recommended Operating Pressure:
 Maximum positive and negative:
 3" thru 10" diameters = 12" w.g.
 12" diameter = 8" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. Range: -100°F to +430°F
- Flame Speed 0
- Smoke Developed 0

INSTALLATION: Air duct connections and joints shall be made per installation instructions outlined by Builder's Best and as required by the UL 181 listing procedure. (Installation instructions are included inside each carton.)

LABELS



WARRANTY

Complete warranty statement at buildersbest.com/warranty

Duct V350U Metallflex Air Duct V5 spec sheet 8/16/23