



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@venting.biz
 BuildersBest.com

Periscope 0-18"

DESCRIPTION


The 0-18" Periscope is a rigid aluminum clothes dryer duct which telescopes to the top of most dryers.

PRODUCT FEATURES

- Reaches the side of most dryers
- Two piece assembly
- Sections are NOT reversible,
- Smooth interior decreases air friction


PRODUCT SPECIFICATIONS

- 2" x 6" rigid 26 gauge aluminum
- 4" Draw band swiveling female collar
- 4" Crimped swiveling snap-lock male fitting

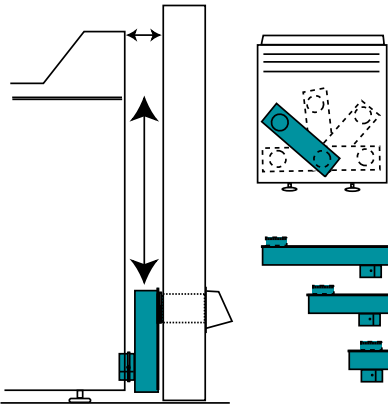

PART NUMBERS

Dia.	Length	Note	Each #	Qty	Case #	Package	UPC	Labeled?
4"	0-18"	with baffle	10172	4	110172	Disp. Box	722048101722	•
4"	0-18"	with baffle	10128	4	110128	Disp. Bag	722048101289	•
4"	0-18"	with baffle	10128	8	010158	Disp. Bag	722048101289	•
4"	0-18"	with baffle	10146	8	110146	Bulk	722048101463	•
4"	0-18"	with baffle	10148	4	110148	Ind. Box	722048101487	•
4"	0-18"	w/ baffleUL@2158A	12276	4	112276	Ind. Box	722048122765	•

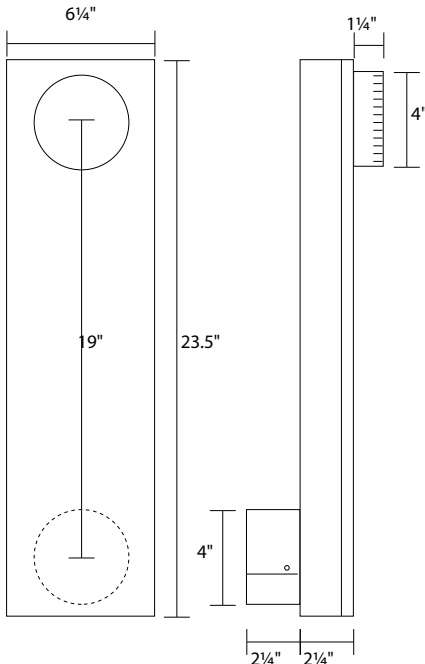

PATENTS:

US 5,653,631; 5,943,743; 6,035,495; 5,121,948; D.342,782
 Canadian 2,062,123; 2,063,098; 2,201,956; 2,279,599

RECOMMENDATIONS

- The International Mechanical Code recommends rigid metal duct for dryer exhaust as well as in-wall exhaust. IMC 504.6.1 & 504.8-3
- Dryer manufacturers specify "Only rigid or flexible metal vent shall be used for exhausting. Do not use plastic or metal foil vent."

PERFORMANCE DATA AND AIRFLOW

Pressure Rating:

Positive: 6" WC max Negative: 6" WC max


Maximum velocity: 5,000 FPM

Operating Temp. Range: -100°F to+ 430°F


Flame Spread 0 Smoke Developed 0

INSTALLATION: (Installation instructions are included inside each carton.)

Periscopes provide nearly the same airflow properties as one semi-rigid metal flexible pipe with two Close Elbows®.

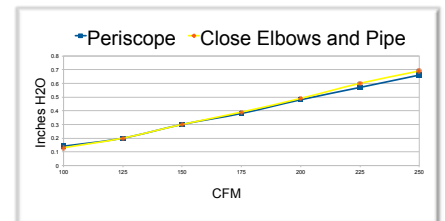

LABELS



WARRANTY

Complete Warranty Statement at <https://www.buildersbest.com>