



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 BuildersBest.com

SEMI-RIGID FLEXIBLE ALUMINUM DUCT V320 Crimped One End



DESCRIPTION


The V320 Semi-Rigid Flexible Aluminum Duct is a non-insulated Class 0 duct used as general purpose venting supply, return or exhaust with one end crimped for smoother connections.

PRODUCT FEATURES

- One end crimped and one plain end
- 8 ft length ships compressed to 24 in

PRODUCT SPECIFICATIONS


- Thinner wall than V330 PRO
- Semi-rigid corrugated spiral formed out of 100% aluminum alloy
- Non-combustible corrugated aluminum with continuous lockseams
- Class 0 metal duct, non-insulated

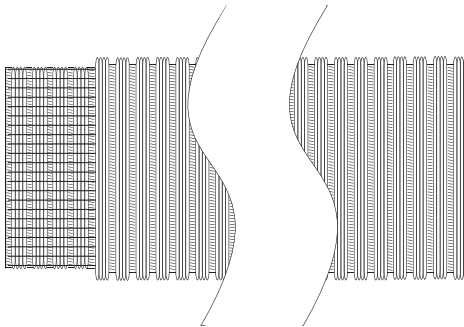

PART NUMBERS

Dia.	Length	Each #	Qty	Case #	Package	UPC	Labeled
3"	8'	10443	10	110443	Display Bag	722048104433	•
3"	8'	10433	20	011458	Bulk	722048104334	
4"	8'	10444	12	110444	Display Bag	722048104440	•
4"	8'	10434	12	110434	Bulk	722048104341	
4"	20'	10439	16	110439	Bulk	722048104396	
5"	8'	10445	6	110445	Display Bag	722048104457	•
5"	8'	10435	6	110435	Bulk	722048104358	
6"	8'	10446	4	011463	Display Bag	722048104464	•
6"	8'	10436	4	010431	Bulk	722048104365	
7"	8'	10447	4	011465	Display Bag	722048104471	•
7"	8'	10437	4	011466	Bulk	722048104372	
8"	8'	10448	4	011468	Display Bag	722048104488	•
8"	8'	10438	4	011469	Bulk	722048104389	

AIRFLOW

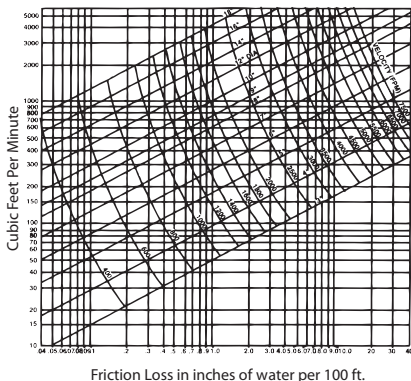

PERFORMANCE DATA

- Pressure rating:
 Maximum positive and negative
 3" thru 8" diameters = 6" w.g.
- Maximum velocity: 5,000 FPM
- Operating Temp. range: -100°F to +430°F
- Flame Spread: 0
- Smoke Developed: 0

LABELS



WARRANTY

Complete warranty statement at buildersbest.com/warranty